(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 3 January 2002 (03.01.2002)

PCT

(10) International Publication Number WO 02/01794 A2

(51) International Patent Classification7:

1 (1

(21) International Application Number: PCT/US01/19223

(22) International Filing Date: 14 June 2001 (14.06.2001)

(25) Filing Language:

English

H04L 9/32

(26) Publication Language:

English

(30) Priority Data: 09/605,605

28 June 20

28 June 2000 (28.06.2000) US

(71) Applicant (for all designated States except US): INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): ELLISON, Carl [US/US]; 1818 NW 28th Avenue, Portland, OR 97210 (US). SUTTON, James, II [US/US]; 20205 NW Paulina Drive, Portland, OR 97229 (US).

(74) Agent: MALLIE, Michael, J.; Blakely Sokoloff Taylor & Zafman, 7th Floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US). (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

 without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A PLATFORM AND METHOD FOR ESTABLISHING PROVABLE IDENTITIES WHILE MAINTAINING PRIVACY

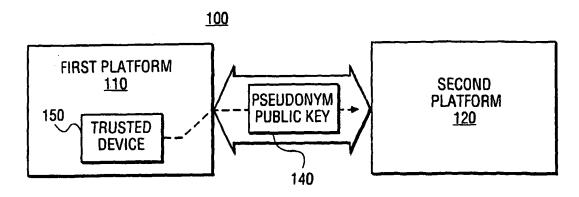

(57) Abstract: In one embodiment, a method for utilizing a pseudonym to protect the identity of a platform and its user is described. The method comprises producing a pseudonym that includes a public pseudonym key. The public pseudonym key is placed in a certificate template. Hash operations are performed on the certificate template to produce a certificate hash value, which is transformed from the platform. Thereafter, a signed result is returned to the platform. The signed result is a digital signature for the transformed certificate hash value. Upon performing an inverse transformation of the signed result, a digital signature of the certificate hash values is recovered. This digital signature may be used for data integrity checks for subsequent communications using the pseudonym.





A PLATFORM AND METHOD FOR ESTABLISHING PROVABLE IDENTITIES WHILE MAINTAINING PRIVACY

Field

5

10

15

20

25

30

This invention relates to the field of data security. In particular, the invention relates to a platform and method that protects an identity of the platform through creation and use of pseudonyms.

Background

Advances in technology have opened up many opportunities for applications that go beyond the traditional ways of doing business. Electronic commerce (e-commerce) and business-to-business (B2B) transactions are now becoming popular, reaching the global markets at a fast rate. Unfortunately, while electronic platforms like computers provide users with convenient and efficient methods of doing business, communicating and transacting, they are also vulnerable for unscrupulous attacks. This vulnerability has substantially hindered the willingness of content providers from providing their content in a downloaded, digital format.

Currently, various mechanisms have been proposed to verify the identity of a platform. This is especially useful to determine if the platform features a "trusted" device; namely, the device is configured to prevent digital content from being copied in a non-encrypted format without authorization. One verification scheme involves the use of a unique serial number assigned to a platform for identification of that platform. Another verification scheme, performed either independently from or cooperatively with the previously described verification scheme, involves the use of a permanent key pair. The permanent key pair includes (i) a unique public key that identifies the platform and (ii) a private key that is permanently stored in memory of the trusted device. The private key is confidential and is not provided outside the trusted device. However, these verification schemes pose a number of disadvantages.

For example, each of these verification schemes is still subject to data aggregation attacks. "Data aggregation" involves the collection and analysis of data transmitted from a platform over a period of time. Thus, the use of platform serial numbers and permanent keys for identification purposes has recently lead to consumer privacy concerns. Also, for both verification mechanisms, a user cannot easily and reliably control access to and use of the platform identity on a per-use basis.

BRIEF DESCRIPTION OF THE DRAWINGS

The features and advantages of the present invention will become apparent from the following detailed description of the present invention in which:

Figure 1 is a block diagram of an illustrative embodiment of a system utilizing the present invention.

Figure 2 is a block diagram of an illustrative embodiment of the trusted logic employed within the first platform of Figure 1.

5

10

15

. 20

25

30

Figure 3 is a flowchart of an illustrative embodiment describing allocation and use of a pseudonym produced within the first platform of Figure 1.

Figures 4 and 5 are flowcharts of an illustrative embodiment of the production and certification of pseudonyms.

DETAILED DESCRIPTION

The present invention relates to a platform and method for protecting the identity of the platform through the creation and use of pseudonyms. Herein, certain details are set forth in order to provide a thorough understanding of the present invention. It is apparent to a person of ordinary skill in the art, however, that the present invention may be practiced through many embodiments other that those illustrated. Well-known circuits and cryptographic techniques are not set forth in detail in order to avoid unnecessarily obscuring the present invention.

In the following description, terminology is used to discuss certain features of the present invention. For example, a "platform" includes hardware and/or software that process information. Examples of a platform include, but are not limited or restricted to any of the following: a computer (e.g., desktop, a laptop, a hand-held, a server, a workstation, etc.); data transmission equipment (e.g., a router, switch, facsimile machine, etc.), wireless equipment (e.g., cellular base station, telephone handset, etc.); or television set-top box. "Software" includes code that, when executed, performs a certain function. "Information" is defined as one or more bits of data, address, and/or control.

With respect to cryptographic functionality, a "cryptographic operation" is an operation performed for additional security on information. These operations may include encryption, decryption, hash computations, and the like. In certain cases, the cryptographic operation requires the use of a key, which is a series of bits. For

asymmetric key cryptography, a device is associated with unique, permanent key pair that includes a public key and a private key.

5

10

15

20

25

30

In addition, asymmetric key cryptography normally utilizes a root certificate. A "root certificate" is a public key at the origination of a digital certificate chain and provides a starting point for all subsequent digital certificates. In general, a "digital certificate" includes information used to authenticate a sender of information. For example, in accordance with CCITT Recommendation X.509: The Directory - Authentication Framework (1988), a digital certificate may include information (e.g., a key) concerning a person or entity being certified, namely encrypted using the private key of a certification authority. Examples of a "certification authority" include an original equipment manufacturer (OEM), a software vendor, a trade association, a governmental entity, a bank or any other trusted business or person. A "digital certificate chain" includes an ordered sequence of two or more digital certificates arranged for authorization purposes as described below, where each successive certificate represents the issuer of the preceding certificate.

A "digital signature" includes digital information signed with a private key of its signatory to ensure that the digital information has not been illicitly modified after being digitally signed. This digital information may be provided in its entirety or as a hash value produced by a one-way hash operation.

A "hash operation" is a one-way conversion of information to a fixed-length representation referred to as a "hash value". Often, the hash value is substantially less in size than the original information. It is contemplated that, in some cases, a 1:1 conversion of the original information may be performed. The term "one-way" indicates that there does not readily exist an inverse function to recover any discernible portion of the original information from the fixed-length hash value. Examples of a hash function include MD5 provided by RSA Data Security of Redwood City, California, or Secure Hash Algorithm (SHA-1) as specified a 1995 publication Secure Hash Standard FIPS 180-1 entitled "Federal Information Processing Standards Publication" (April 17, 1995).

Referring to Figure 1, a block diagram of an illustrative embodiment of a system 100 utilizing the present invention is shown. The system 100 comprises a first platform 110 and a second platform 120. First platform 110 is in communication with second platform 120 via a link 130. A "link" is broadly defined as one or more information-carrying mediums (e.g., electrical wire, optical fiber, cable, bus, or wireless signaling technology). When requested by the user, first platform 110 generates and transmits a

pseudonym public key 140 (described below) to second platform 120. In response, second platform 120 is responsible for certifying, when applicable, that pseudonym public key 140 was generated by a trusted device 150 within first platform 110.

Referring now to Figure 2, in one embodiment, trusted device 150 comprises hardware and/or protected software. Software is deemed "protected" when access control schemes are employed to prevent unauthorized access to any routine or subroutine of the software. More specifically, device 150 is one or more integrated circuits that prevents tampering or snooping from other logic. The integrated circuit(s) may be placed in a single integrated circuit (IC) package or a multi-IC package. A package provides additional protection against tampering. Of course, device 150 could be employed without any IC packaging if additional protection is not desired.

5

10

15

20

25

30

Herein, device 150 comprises a processing unit 200 and a persistent memory 210 (e.g., non-volatile, battery-backed random access memory "RAM", etc.). Processing unit 200 is hardware that is controlled by software that internally processes information. For example, processing unit 200 can perform hash operations, perform logical operations (e.g. multiplication, division, etc.), and/or produce a digital signature by digitally signing information using the Digital Signature Algorithm. Persistent memory 210 contains a unique asymmetric key pair 220 programmed during manufacture. Used for certifying pseudonyms, asymmetric key pair 220 includes a public key (PUKP1) 230 and a private key (PRKP1) 240. Persistent memory 210 may further include a public key 250 (PUKP2) of second platform 120, although it may be placed in volatile memory (e.g., RAM, register set, etc.) within device 150 if applicable.

In this embodiment, device 150 further comprises a number generator 260 such as a random number generator or a pseudo-random number generator. Number generator 260 is responsible for generating a bit stream that is used, at least in part, to produce one or more pseudonyms. A "pseudonym" is an alias identity in the form of an alternate key pair used to establish protected communications with another platform and to identify that its platform includes trusted device 150. The pseudonym also supports a challenge/response protocol and a binding of licensing, secrets and other access control information to the specific platform. It is contemplated, however, that number generator 260 may be employed externally from device 150. In that event, the greater security would be realized by platform 110 if communications between number generator 260 and device 150 were protected.

Referring to Figure 3, a flowchart of an illustrative embodiment describing allocation and use of a pseudonym is shown. To fully protect the user's privacy, the user should have positive control of the production, allocation and deletion of pseudonyms. Thus, in response to explicit user consent, a new pseudonym is produced (blocks 300 and 310). Also, to access information (e.g., label, public key, etc.) that identifies an existing pseudonym, explicit user consent is needed (blocks 320 and 330). Explicit user consent may be given by supplying a pass-phrase (e.g., series of alphanumeric characters), a token, and/or a biometric characteristic to the trusted device. For example, in one embodiment, a user pass-phrase may be entered through a user input device (e.g., a keyboard, mouse, keypad, joystick, touch pad, track ball, etc.) and transferred to the trusted device. In another embodiment, memory external to the logic may contain pseudonyms encrypted with a hash value of a user pass-phrase. Any of these pseudonyms can be decrypted for use by again supplying the user pass-phrase.

5

10

15

20

25

30

Once a pseudonym has been produced and allocated for use in communications with a remote platform, this pseudonym represents the persistent platform identity for that platform/platform communications, so long as the user chooses to retain the pseudonym (blocks 340, 350 and 360).

Referring now to Figures 4 and 5, flowcharts of an illustrative embodiment of the production and certification of pseudonyms are shown. Initially, upon receiving a request by the user, the pseudonym is produced by the device in coordination with a number (block 400). A pseudonym public key (PPUKP1) is placed in a digital certificate template (block 405). The digital certificate template may be internally stored within the first platform or provided by the second platform in response to a request for certification from the first platform. Thereafter, the digital certificate template undergoes a hash operation to produce a certificate hash value (block 410).

Thereafter, the certificate hash value undergoes a transformation similar to that described in U.S. Patent Nos. 4,759,063 and 4,759,064 to create a "blinded" certificate hash value (block 415). In particular, the certificate hash value is multiplied by a pseudorandom number (e.g., a predetermined number raised to a power that is pseudo-randomly select). The pseudo-random power is maintained in confidence within the first platform (e.g., placed in persistent memory 210 of Figure 2).

A certification request, including at least the transformed (or blinded) certificate hash value, is created (block 420). The certification request is digitally signed with the private key (PRKP1) of the first platform (block 425). A device certificate, namely a

digital certificate chain that includes the public key (PUKP1) of the first platform in one embodiment, is retrieved or generated to accompany the signed certificate request (block 430). In this embodiment, the device certificate features a high-level certificate including PUKP1 and a lowest level certificate including the root certificate. Of course, the device certificate may be a single digital certificate including PUKP1. Both the signed certificate request and device certificate are encrypted with the public key (PUKP2) of the second platform and then transferred to the second platform (blocks 435 and 440).

5

10

15

20

25

30

At the second platform, the signed certificate request and device certificate are recovered after being decrypted using the private key (PRKP2) of the second platform (block 445). The public key (PUKP1) of the first platform may be obtained using a public key of the certification authority responsible for signing the device certificate (block 450). If the second platform can recover the certificate request, the second platform verifies the device certificate back to the root certificate (blocks 455 and 460). If the certificate request is recovered and the device certificate is verified, the transformed (or blinded) certificate hash value is digitally signed to produce a "signed result" (block 465). Otherwise, if either the transformed (or blinded) certificate hash value cannot be determined or the device certificate cannot be verified, an error message is returned to the first platform (block 470).

Upon receipt of the signed result from the second platform, the first platform performs an inverse transformation on the signal result. For example, in this illustrative embodiment, the first platform divides the signed result by an inverse of the pseudorandom number (e.g., the predetermined number raised to an inverse of the pseudorandom power) to recover a digital signature of the certificate hash value (blocks 475 and 480). The digital signature is stored with one or more pseudonyms for use in subsequent communications with other platforms to identify that the first platform includes a trusted device.

While this invention has been described with reference to illustrative embodiments, this description is not intended to be construed in a limiting sense. Various modifications of the illustrative embodiments, as well as other embodiments of the invention, which are apparent to persons skilled in the art to which the invention pertains are deemed to lie within the spirit and scope of the invention.

CLAIMS

What is claimed is:

5

10

1. A method comprising:

producing a pseudonym including a public pseudonym key within a platform; placing the public pseudonym key into a certificate template;

performing a hash operation on the certificate template to produce a certificate hash value;

performing a transformation on the certificate hash value for transmission from the platform;

receiving a signed result being a digital signature for the transformed certificate hash value; and

performing an inverse transformation on the signed result to recover a digital signature of the certificate hash value.

- The method of claim 1, wherein the producing of the pseudonym includes
 generating the public pseudonym key and a private pseudonym key corresponding to the public pseudonym key.
 - 3. The method of claim 1, wherein the placing of the public pseudonym key into the certificate template includes writing the public pseudonym key into a field of the certificate template.
- 20 4. The method of claim 1, wherein the performing of the transformation comprises:

performing a logical operation on the certificate hash value using a pseudo-random number to produce a value differing from the certificate hash value.

5. The method of claim 4, wherein the pseudo-random number is a predetermined value raised to an inverse power designated by a pseudo-random value.

6. The method of claim 5, wherein the pseudo-random value is stored in secure memory.

- 7. The method of claim 4, wherein the performing of the inverse transformation comprises performing a logical operation on the signed result using an inverse of the pseudo-random number.
 - 8. The method of claim 1, wherein prior to receiving the digital signature, the method comprises:

digitally signing a certification request, including the transformed certificate hash value, with a private key of a first platform to produce a signed certification request.

10 9. The method of claim 8, wherein prior to receiving the digital signature, the method further comprises:

obtaining a device certificate being a digital certificate chain that includes a public key of a first platform, to accompany the signed certificate request

10. The method of claim 9, wherein prior to receiving the digital signature, the method further comprises:

transferring the signed certificate request and the device certificate to a second platform.

11. The method of claim 11 further comprising:

storing the digital signature of the certificate hash value for use in subsequent 20 communications to a remotely located platform.

- 12. A device comprising:
- a processing unit; and

25

a persistent memory including a first key pair and at least one pseudonym for use in communications with a remotely located device and in identifying that a platform containing the device is secure.

13. The device of claim 12, wherein the at least one pseudonym includes a second key pair.

- 14. The device of claim 13, wherein the second key pair is erased after a communication session with the remotely located device has concluded.
- 5 15. The device of claim 12 further comprising: a number generator to assist in producing the at least one pseudonym.
 - 16. A platform comprising:
 - a transceiver; and
- a device in communication with the transceiver, the device including a persistent
 memory to contain a permanent key pair, at least one pseudonym generated internally
 within the device and a digital signature of a hash value of a digital certificate chain that
 includes a public pseudonym key of the pseudonym.
- 17. The platform of claim 16, wherein the device further includes:

 a processing unit to (i) write the public pseudonym key into a certificate template,

 (ii) perform a hash operation on the certificate template to produce a certificate hash value,
 (iii) to perform a transformation operation on the certificate hash value.
 - 18. The platform of claim 17, wherein the processing unit of the device further produces a digital signature of at least the transformed certificate hash value using a private key of the permanent key pair.
- 20 19. The platform of claim 16, wherein the processing unit of the device further appending a device certificate with the digital signature of at least the transformed certificate hash value.
 - 20. The platform of claim 19, wherein the device certificate is the digital certificate chain.

1/4

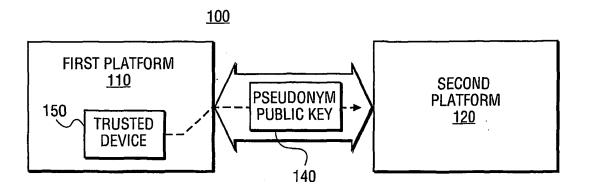


FIG. 1


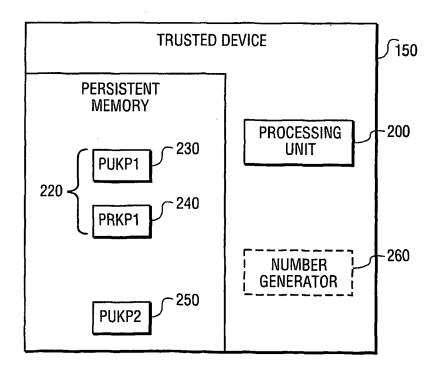


FIG. 2

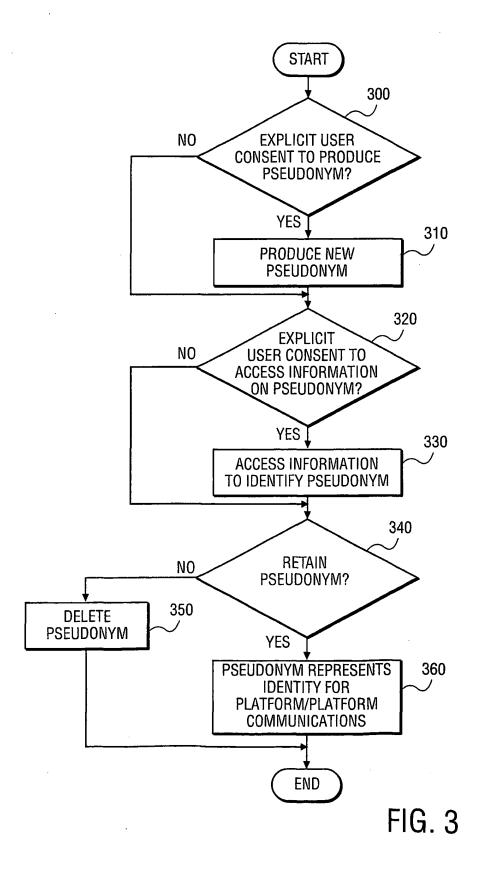

SUBSTITUTE SHEET (RULE 26)

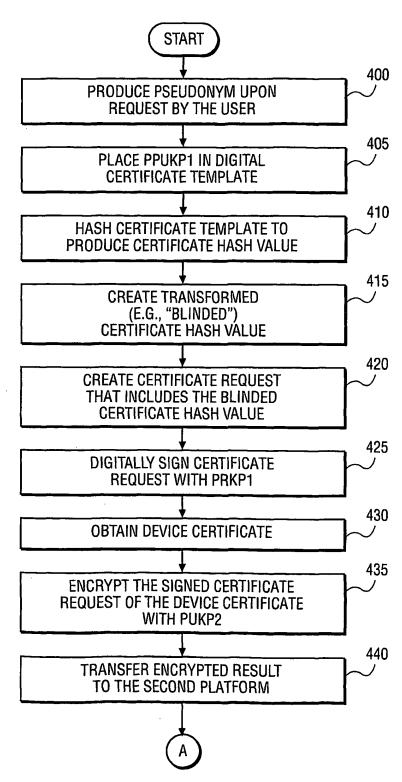


FIG. 4

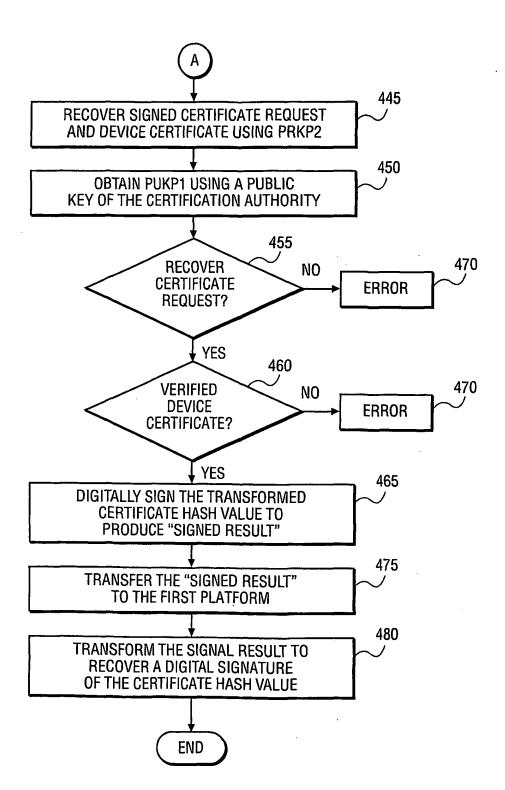


FIG. 5

(19) World Intellectual Property Organization International Bureau





(43) International Publication Date 3 January 2002 (03.01.2002)

PCT

(10) International Publication Number WO 02/001794 A3

(51) International Patent Classification7:

10

H04L 9/32

(21) International Application Number: PCT/US01/19223

(22) International Filing Date: 14 June 2001 (14.06.2001)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data: 09/605,605

28 June 2000 (28.06.2000) U-

- (71) Applicant (for all designated States except US): INTEL CORPORATION [US/US]; 2200 Mission College Boulevard, Santa Clara, CA 95052 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): ELLISON, Carl [US/US]; 1818 NW 28th Avenue, Portland, OR 97210 (US). SUTTON, James, II [US/US]; 20205 NW Paulina Drive, Portland, OR 97229 (US).
- (74) Agent: MALLIE, Michael, J.; Blakely Sokoloff Taylor & Zafman, 7th Floor, 12400 Wilshire Boulevard, Los Angeles, CA 90025 (US).

- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published:

with international search report


(88) Date of publication of the international search report: 26 September 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: A PLATFORM AND METHOD FOR ESTABLISHING PROVABLE IDENTITIES WHILE MAINTAINING PRIVACY

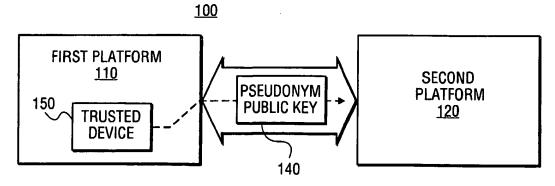

(57) Abstract: In one embodiment, a method for utilizing a pseudonym to protect the identity of a platform and its user is described. The method comprises producing a pseudonym that includes a public pseudonym key. The public pseudonym key is placed in a certificate template. Hash operations are performed on the certificate template to produce a certificate hash value, which is transformed from the platform. Thereafter, a signed result is returned to the platform. The signed result is a digital signature for the transformed certificate hash value. Upon performing an inverse transformation of the signed result, a digital signature of the certificate hash values is recovered. This digital signature may be used for data integrity checks for subsequent communications using the pseudonym.





INTERNATIONAL SEARCH REPORT

International Application No PCT/US 01/19223

			7 0 1 7 0 0 0 1 7 1 3 2 2 0	
A. CLASSI IPC 7	FICATION OF SUBJECT MATTER H04L9/32			
According to	o International Patent Classification (IPC) or to both national classific	ation and IPC		
B. FIELDS	SEARCHED			
Minimum do IPC 7	ocumentation searched (classification system followed by classification H04L	on symbols)		
	tion searched other than minimum documentation to the extent that s			
	ata base consulted during the international search (name of data baternal, WPI Data, PAJ, INSPEC	se and, where practical	, search terms used)	
C. DOCUME	ENTS CONSIDERED TO BE RELEVANT			
Category °	Citation of document, with indication, where appropriate, of the rel	evant passages	Relevant to daim No.	
X	STEFAN BRANDS: "Restrictive blir secret-key certificates" SPRINGER-VERLAG, 1995, XP002201306 Germany Chapter 3 abstract	nding of	1-20	
А	US 5 606 617 A (BRANDS STEFANUS A 25 February 1997 (1997-02-25) column 20 -column 21	1-20		
A	US 4 759 064 A (CHAUM DAVID L) 19 July 1988 (1988-07-19) abstract 	-/	1-20	
X Funt	ner documents are listed in the continuation of box C.	X Patent family	members are listed in annex.	
A docume consid *E* earlier of filing d *L* docume which citation *O* docume other n *P* docume	ent defining the general state of the art which is not lered to be of particular relevance socument but published on or after the international late and which may throw doubts on priority claim(s) or is cited to establish the publication date of another or other special reason (as specified) ent referring to an oral disclosure, use, exhibition or means	*T* later document published after the international filing date or priority date and not in conflict with the application but clied to understand the principle or theory underlying the invention "X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family		
Date of the a	actual completion of the international search	Date of mailing of	the international search report	
5	June 2002	26/06/2002		
Name and n	nalling address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (-31-70) 340-3016	Authorized officer San Millán Maeso, J		

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 01/19223

	MENTS CONSIDERED TO BE RELEVANT	
ategory * Citation of	document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Cryp 1997	ZES, OORSCHOT: "Handbook of Applied tography" , CRC PRESS LLC , USA XP002201307 475	1-20
	•	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No PCT/US 01/19223

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5606617	A	25-02-1997	AT	211870 T	15-01-2002
			AU	705406 B2	20-05-1999
			AU	3755695 A	06-05-1996
			CA	2200592 A1	25-04-1996
			DE	69524968 D1	14-02-2002
			DK	786178 T3	29-04-2002
			EP	0786178 A1	30-07-1997
			WO	9612362 A2	25-04-1996
US 4759064	A	19-07-1988	AT	75893 T	15-05-1992
			DE	3685186 D1	11-06-1992
			EP	02183 0 5 A1	15-04-1987
			ES	2032746 T3	01-03-1993
			GR	3005322 T3	24-05-1993